


2066

Single Register Text Inserter

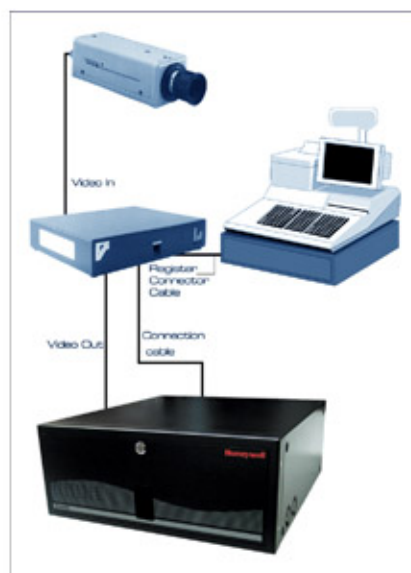

The Single Register

Text Inserter is designed for single register applications on any BNC video switching system. The text inserter sends the transaction data from one register onto the camera video signal. This composite image can be viewed live or in playback on a video recorder, analog or digital. Questionable transactions such as VOID and NO SALE can be alarmed by flashing text for easy recognition and can be reviewed in minutes. The alarms can be programmed to remain active for a specified length of time for viewing purposes.

FEATURES

- use with any commercial-grade video equipment
- interfaces electronic registers and pc-based systems
- easy to install and program with a standard touch-tone telephone or PC
- display data anywhere on screen for optimal viewing
- alarms up to 20 transaction types
- integrates with CYA Software
- nonvolatile memory—settings are saved if a power outage occurs
- built-in test and demo modes
- durable metal casing
- easy to convert Text Inserter to a different register make and model
- backed by a one-year, limited warranty

FLASH! MEMORY SYSTEM

A rom chip programs the Text Inserters and Interface Units for a specific register make and model.

Not Compatible with
RegView Software

STOP EMPLOYEE THEFT!!

ALARMS: up to 20, alarms offset by flashing
CABLE (ALARM): twisted pair on terminal strip
CABLE (REGISTER): DB25 on Text Inserter, register end varies
CABLE (VIDEO IN/OUT): coaxial cable, BNC connectors
CCTV: standard black and white or color, 2:1 interlace cameras (not random interlace), any VCR and monitor
DATA RATE: to PC—9600 baud, no parity, 8 bit
DIMENSIONS: 6³/₄" x 6¹/₄" x 2¹/₄"
DISPLAY (COLOR): black or white text/clear or black background
DISPLAY (LINES): two to 12 lines
DISPLAY (POSITION): anywhere on screen
DISPLAY (SIZES): large or small text
DISTANCE: 6' to register
ON-SCREEN FLAGS: alarmed transactions flash
OPERATING TEMPERATURE: 38°F to 105°F
OPTION: CYA PC software
POWER: 9 Volt DC, 1 amp operating mode; 1.3 amp resetting fuse and diode protected
POWER INPUT: RCA phone jack
PROGRAMMING: through a standard touch-tone telephone or PC
WEIGHT: 24 oz.