

HEGS5300

VIDEO MATRIX SYSTEM KEYBOARD

The Honeywell HEGS5300 represents an intelligent, user-friendly approach to the MAXPRO-Net Video Management System.

Designed to take full advantage of the powerful features of the Honeywell Matrix Systems, the HEGS5300 offers a completely programmable interface to the MAX system. The design of the HEGS5300 and its interaction with the Honeywell MAX matrix allows for a customized user interface based on the demands of the installation and application.

100 programmable and 10 dedicated hard keys are provided for operations, including: alternate camera selection, PTZ call, sequence selection, tours, recorder selection, function, review, print, dub, alarm acknowledge.

Market Opportunities

The unique method of programmable control and interface options of the HEGS5300 ensure that menu commands for many medium and large MAX management systems are accessed quickly and intuitively. The result is unparalleled ease of use and control of any function within the MAX management system. This significantly reduces training requirements and vastly improves efficiency and response times. The HEGS5300 is perfect for installations requiring a rugged controller that can take years of use and abuse.

Features



- Stylish customizable Lexan® keyboard overlay
- 10 standard function keys, 100 programmable keys
- Alternative key grouping available
- 10 user programmable "Macro" selections are available
- 2-Line LCD display
- Variable-speed joystick with integral zoom control
- Intuitive universal icon
- Fully configurable



SPECIFICATIONS

| Operational | |
|------------------------|-----------------------------------------------------------------------------------------------------------|
| Communication Speeds | RS232 - 19.2 Kb or 9600 baud |
| Operating Distances | 50' (15.2m) for RS232 |
| LCD Touch Screen | 2-line, backlit |
| Joystick | 3-axis proportional control |
| Keypad | Momentary, push-button, numeric and standard menu commands |
| PTZ Dome Control | Full pan/tilt/zoom control using joystick. Keypad control of iris open/close/auto and focus far/near/auto |
| Electrical | |
| Input Voltage | 100 - 240 VAC |
| Operating Voltage | 12 VDC |
| Power Consumption | 10 W |
| Mechanical | |
| Dimensions (W x H x D) | 17.4" x 1.7" x 6.9" (442 mm x 43 mm x 175 mm) |
| Weight | Unit:~4 lbs (1.81 kg) Shipping:8 lbs (3.63 kg) |
| Construction | Housing: Metal chassis Finish: Black |

| Connections | |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| RJ11 | Pin 1: Power Ground Pin 2: RS232 TX Data Pin 3: Signal Ground Pin 4: RS232 RX Data Pin 5: N/C (no connection) Pin 6: Power |
| Environmental | |
| Temperature | Operating: 32°-122°F (0°-50°C) Storage: 14°-140°F (-10° - 60°C) |
| Relative Humidity | 10%-95% (non-condensing) |
| Regulatory | |
| Emissions | FCC Part 15, Class A CE: EN61000-6-4:2001 |
| Immunity | CE: EN50130-4: 1995 +A1:1998+A3:2003 |
| System Compatibility | |
| HMXAT200 | System Controller |
| MAXPRO-Net | System Server |

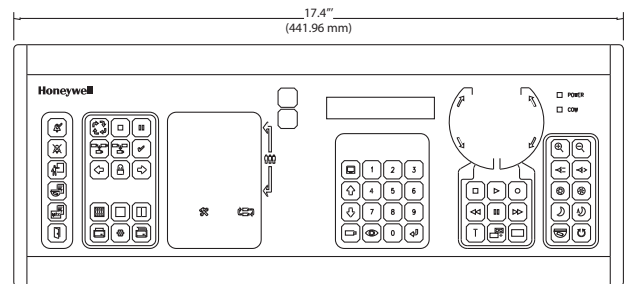

Ordering

| | |
|----------|-------------------------------------------------------------------------------------------------|
| HEGS5300 | Honeywell Matrix System Keyboard, includes RJ11 termination box and 5' standard interface cable |
|----------|-------------------------------------------------------------------------------------------------|

NOTE: Honeywell reserves the right, without notification, to make changes in product design or specifications.

Honeywell Security

Honeywell Video Systems
2700 Blankenbaker Pkwy, Suite 150
Louisville, KY 40299
1.800.796.CCTV
www.honeywell.com

L/HGS5300D/D
January 2008
© 2008 Honeywell International Inc.