

KZ0224NEMA, KZ0224UW

DOME POWER SUPPLIES



KZ0224NEMA



KZ0224UW

The KZ0224 units are high-performance power supplies for use with any Ultrak KD6 or KDZ series outdoor dome. Both units include two 24v AC outputs for camera and heater/blower and are housed in NEMA-4 enclosures for extreme outdoor protection. The KZ0224UW includes lightning surge suppression for power, video, and data.

An on/off switch and LED indicator help to simplify installation. Both units are CE and UL approved.

- Entire unit fused
- Separate power for camera and heater/blower
- UL listed
- 110/220 switchable (KZ0224UW)
- NEMA rated enclosure
- Lightning surge suppression
- 2 year limited warranty
- On/off switch and LED indicator for power
- Interconnect label for easy servicing



KZ0224NEMA, KZ0224UW

TECHNICAL SPECIFICATIONS

Models

KZ0224NEMA	Outputs - 2
	Fuseless - Yes
	ULC - No
	Isolated - Via SmartFuse
	Max/Channel - 1 & 4 Amps
KZ0224UW	Outputs - 2
	Fuseless - No
	ULC - Yes
	Isolated - Via Glass Fuse
Power indicator	Max/Channel - 1 & 5 Amps
	Total Current - 6.3 Amps
	Green

KZ0224NEMA ELECTRICAL

Input Voltage	110V AC
Output Voltage	24V AC
Surge Protection	Power
Clamping Voltage	68V RMS
Response Time	Less than 10nS
Energy Rating	168VA
Current Output	5 Amps
Unit Fuse Protection	7 Amps

KZ0224NEMA GENERAL

Construction	NEMA 4 Box
Dimensions	8 x 6 x 4 Inches
Weight	10 lbs.



KZ0224UW ELECTRICAL

Input Voltage	110/220V AC
Output Voltage	24V AC
Surge Protection	Power, Video & Data
Clamping Voltage	AC: 340V RMS @ 6A
	Video: 24V RMS @ 1.1A
	Power: 24V RMS @ 1.1A
Response Time	Less than 1nS
Energy Rating	144VA
Current Output	6 Amps
Unit Fuse Protection	6.3 Amps



KZ0224UW GENERAL

Construction	NEMA 4 Box
Dimensions	8 x 6 x 4 Inches
Weight	12 lbs.

KZ0224NEMA

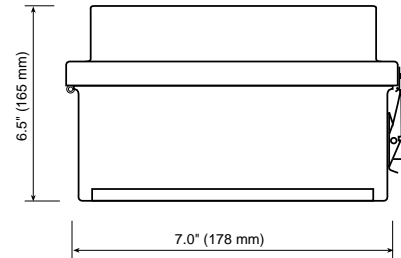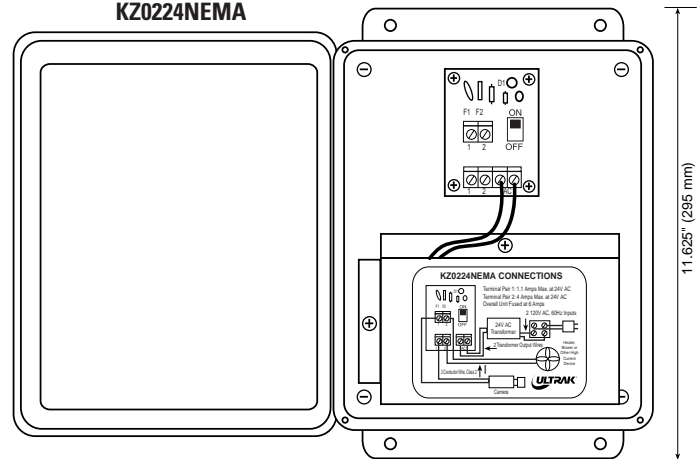

KZ0224UW

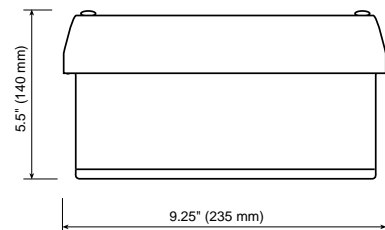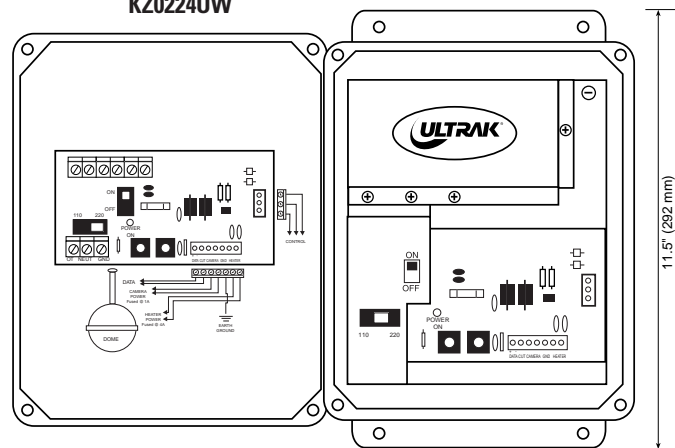

Design and specifications subject to change without notice.

Conversion: 1" = 25.4mm
Measurement conversions are approximate

Ultrak Worldwide Support Center:

1305 Waters Ridge Drive
Lewisville, TX 75057
(800) 796-2288 (972) 353-6500
Fax (972) 353-6670

