

## H3D2F

www.honeywellvideo.com

### equip® SERIES 1080p MFZ LENS TRUE DAY/NIGHT H.264 INDOOR MINIDOME IP CAMERA

The H3D2F is a high definition, True Day/Night indoor fixed minidome network camera engineered to provide extremely crisp images at minimal bandwidth. The H3D2F provides 1080p (1920 x 1080) resolution at full frame rate. Progressive scan technology and 2D edge enhancement provide outstanding clarity and definition. Digital Noise Reduction (DNR) results in significant storage savings without sacrificing image quality in low light. The 1/2.7" progressive scan CMOS sensor offers the latest in digital video surveillance technology with accurate color rendition through a wide variety of lighting conditions. The H3D2F also supports the ONVIF Profile S specification for interoperability between network video products.

The compact, one piece design provides fast and easy installation in any application. The camera comes complete with surface and flush mounting options (compatible with a 4S electrical box) and an optional wall/pendant mount kit is available.

In addition to the low-light color performance, the camera will automatically switch to black and white. In this mode, lighting can be complemented with infrared for discreet/covert low-light surveillance with exceptional monochrome images.

A 3D axis gimbal capable of 360° of pan, 180° of tilt and 360° of horizontal rotation simplifies mechanical camera adjustment. The Motorized Focus and Zoom (MFZ) lens allows the field of view to be adjusted to suit the scene requirements.

A powerful and intuitive web client allows fine tuning of the camera and the auto iris levels. This can also be performed from most NVR setup utilities.

The H3D2F supports dual video streams and multiple compression formats with frame rates up to 30 frames per second. The compression parameters for the two video streams are independently configurable. The primary stream is dedicated to H.264. The secondary stream can be configured for H.264 or MJPEG. The H3D2F features analog video out for aiming and focusing during setup.

With built-in low current Power over Ethernet (IEEE 802.3af), power is supplied to the camera using standard network cabling, eliminating the need for a separate power supply and associated wiring. In situations where PoE support is not available, the unit can also be powered directly from 24 V AC.

#### Market Opportunities

The H3D2F is perfect for installations where excellent picture clarity at minimal bandwidth is required. At three times the resolution of standard analog cameras, yet with similar bandwidth requirements, the H3D2F can be retrofitted on many existing NVR installations without requiring additional storage.

#### Features

- Outstanding image quality, 1080p (1920 x 1080) resolution
- 30 fps progressive scan
- True Day/Night, 3–9 mm or 7–22 mm MFZ lens with mechanical IR cut filter
- Camera tamper detection
- Video motion detection
- Wall/pendant mount kit available
- NTP time synchronization support
- ONVIF Profile S support
- Dual digital video streams, independently configurable, H.264 and/or H.264/MJPEG
- Remote firmware update
- Supports both dynamic and static IP addresses
- Date/time stamp embedded into video stream
- Multiple browser support
- Single model for surface mount and recessed ceiling applications, 4S adapter plate also supplied
- Includes advanced IP locator software to make system setup easy
- Embedded web server for remote setup of camera video and network parameters
- Choice of 24 V AC or PoE IEEE 802.3af power inputs
- Supports input and output alarm contacts
- Supports bidirectional audio



HD

H3D2F shown with mounting ring for surface mount



HD

H3D2F shown without mounting ring for flush mount




## SPECIFICATIONS

Like all cameras in the equip® Series of IP-based products, the H3D2F network camera uses Honeywell technology for camera video motion detection, tamper detection, remote firmware updating and for secure storage of all camera settings. Video motion detection recognizes object motion within the field of view; then a simple on-screen notification alerts the user. Camera tamper detection notifies the user when a camera's field of view is altered, blinded or blurred. This ensures the video's integrity and alerts the customer to either a live event or a system problem that is causing disruption to the video stream. Honeywell's technology also allows users to remotely upload firmware to the camera. Setup is quick and easy and can be customized through a web client or from an NVR. The built-in web server provides password protected access to the camera's video and network setup.



## System Diagram

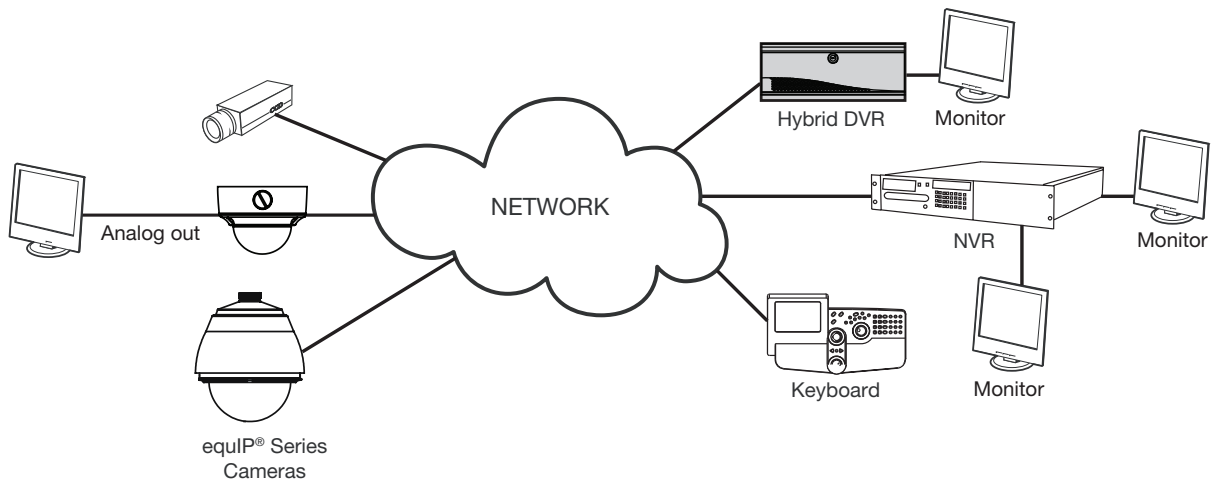

## SPECIFICATIONS


Operational	
Video Standard	NTSC
Scanning System	Progressive scan
Image Sensor	1/2.7" CMOS
Number of Pixels (HxV)	1920 x 1080
Minimum Illumination	H3D2F: 0.18 lux color/0.15 lux BW @ 50 IRE, F1.2 H3D2F2: 0.18 lux color/0.15 lux BW @ 50 IRE, F1.4
Automatic Lens Control	DC Iris Level 1-25
Video Output (AUX)	1.0 Vp-p @ 75 ohms
S/N Ratio	50 dB or more (AGC off)
Auto Gain Control	Off/On, selectable (20-40 dB)
Automatic Electronic Shutter	1/30-1/130,000 sec (NTSC)
Lens Type	H3D2F1: True Day/Night 3-9 mm Motorized Focus and Zoom, F1.2 H3D2F2: True Day/Night 7-22 mm Motorized Focus and Zoom, F1.4
Angle of View	H3D2F1: 117.3°-38° (H); 63°-21.4° (V) H3D2F2: 42°-16° (H); 24°-10° (V)
White Balance	Auto, Manual, WBC Push
Audio/Two-Way	Line in/out
Electrical	
Input Voltage	24 V AC, PoE IEEE 802.3af
Input Range	17-28 V AC
Surge Suppression	1.5 kW transient
Power Consumption	5.0 W (max) 24 V AC PoE: PD Type 1, Class 2
Mechanical	
Dimensions (W x H)	4.9" x 4.9" (125.1 mm x 124.2 mm)
Weight	1.04 lb (0.47 kg) camera only
Construction	Housing: Polycarbonate & Die cast aluminum Finish: Matte texture, off white
Connector	Video Output: 2-pin Molex connector Power Input: Removable screw block Network: RJ45 connector Alarm I/O: Removable screw block Audio In: Removable screw block Audio Out: Removable screw block

Environmental			
Temperature	Operating: 14°F to 122°F (-10°C to 50°C) Storage: -40°F to 158°F (-40°C to 70°C)		
Relative Humidity	0% to 85%, non-condensing		
IP Specifications			
Video Compression	Dual stream H.264 and/or H.264/MJPEG		
Primary Stream Resolution	Bitrate H.264 (Typical)*	Frame Rate	Storage/Day (GB)
1920 x 1080	3.0 Mbps	30	31.6
1280 x 720	1.4 Mbps	30	14.8
800 x 450	0.75 Mbps	30	7.91
640 x 360	0.4 Mbps	30	4.22
320 x 180	0.2 Mbps	30	2.11
Frame Rate NTSC/PAL	Up to 30 fps video in all resolutions		
Video Streaming	Dual streaming: H.264 and/or H.264/MJPEG Controllable frame rate and bandwidth Constant or variable bit rate		
Security	Multiple user access levels with password protection		
Video Access from Web Browser	Full control of all camera settings available to administrator		
Minimum Web Browsing Requirements	Pentium IV CPU 3.1 GHz or faster 1 GB RAM (32-bit) or 2 GB RAM (64-bit) Windows XP® SP3, Windows 2003 Server R2 (32-bit), Windows 7 (32-/64-bit), Windows Vista SP1, Windows 2008 R2 (64-bit) Internet Explorer 8 or 9 Mozilla Firefox® and Google Chrome		
Installation and Management Maintenance	Honeywell IP Utility software identifies the IP address, discovers cameras, supports firmware upgrades		
Supported Protocols	HTTP, TCP, RTSP, RTP, UDP, ARP, DNS, NTP, RTCP, FTP, ICMP, DHCP, Bonjour, IGMP, SSH		
Standards	ONVIF Profile S support		
Regulatory			
Emissions	FCC part 15B, CE (EN55022)		
Immunity	CE (EN50130-4)		
Safety	EU: EN60950-1 North America ETL listed to UL/CSA 60950-1		

\* Actual bitrate is scene and motion dependent with H.264 stream.

## SPECIFICATIONS

<b>System Integration</b>	<b>Accessories</b>	
<b>Open IP Integration</b>	<b>Housing and Mounts</b>	
ONVIF support and open API for software integration. Refer to <a href="http://www.onvif.org">www.onvif.org</a> for the ONVIF specification and the Honeywell Open Technology Alliance ( <a href="http://www.security.honeywell.com/hota">http://www.security.honeywell.com/hota</a> ) to learn more about our open and integrated solutions.	HD3-MK1	Wall/Pendant Mount Kit, Off White

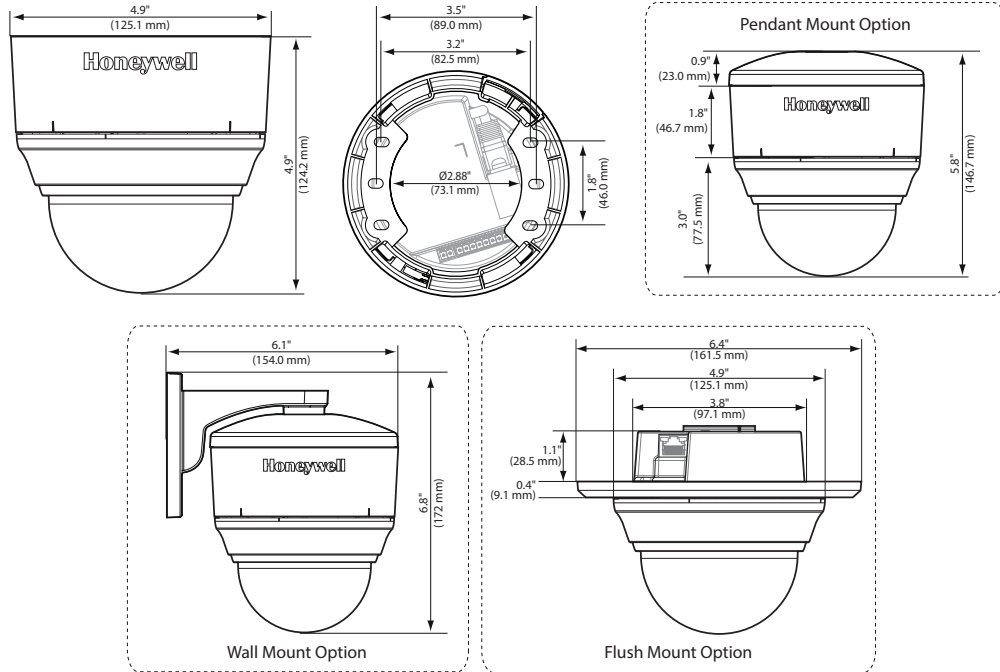

<b>Ordering</b>	
H3D2F1	Network TDN Indoor Minidome Camera, 1/2.7" Progressive Scan, CMOS, 1080p Resolution, 3–9 mm MFZ Lens, 24 V AC or PoE IEEE 802.3af, H.264, NTSC
H3D2F2	Network TDN Indoor Minidome Camera, 1/2.7" Progressive Scan, CMOS, 1080p Resolution, 7–22 mm MFZ Lens, 24 V AC or PoE IEEE 802.3af, H.264, NTSC

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

**For more information:**  
[www.honeywell.com/security](http://www.honeywell.com/security)

**Automation and Control Solutions**  
 Honeywell Security Products Americas  
 2700 Blankenbaker Pkwy, Suite 150  
 Louisville, KY 40299  
 1.800.323.4576  
[www.honeywell.com](http://www.honeywell.com)

L/H3D2FD/D  
 April 2016  
 © 2016 Honeywell International Inc.

