

HEGS5300

www.honeywellvideo.com

VIDEO MATRIX SYSTEM KEYBOARD

The Honeywell HEGS5300 represents an intelligent, user-friendly approach to the MAXPRO-Net Video Management System.

Designed to take full advantage of the powerful features of the Honeywell Matrix Systems, the HEGS5300 offers a completely programmable interface to the MAX system. The design of the HEGS5300 and its interaction with the Honeywell MAX matrix allows for a customized user interface based on the demands of the installation and application.

100 programmable and 10 dedicated hard keys are provided for operations, including: alternate camera selection, PTZ call, sequence selection, tours, recorder selection, function, review, print, dub, alarm acknowledge.

Market Opportunities

The unique method of programmable control and interface options of the HEGS5300 ensure that menu commands for many medium and large MAX management systems are accessed quickly and intuitively. The result is unparalleled ease of use and control of any function within the MAX management system. This significantly reduces training requirements and vastly improves efficiency and response times. The HEGS5300 is perfect for installations requiring a rugged controller that can take years of use and abuse.

Features



- Stylish customizable Lexan® keyboard overlay
- 10 standard function keys, 100 programmable keys
- Alternative key grouping available
- 10 user programmable "Macro" selections are available
- 2-Line LCD display
- Variable-speed joystick with integral zoom control
- Intuitive universal icon
- Fully configurable



SPECIFICATIONS

Operational	
Communication Speeds	RS232 - 19.2 Kb or 9600 baud
Operating Distances	50' (15.2m) for RS232
LCD Touch Screen	2-line, backlit
Joystick	3-axis proportional control
Keypad	Momentary, push-button, numeric and standard menu commands
PTZ Dome Control	Full pan/tilt/zoom control using joystick. Keypad control of iris open/close/auto and focus far/near/auto
Electrical	
Input Voltage	100 - 240 VAC
Operating Voltage	12 VDC
Power Consumption	10 W
Mechanical	
Dimensions (W x H x D)	17.4" x 1.7" x 6.9" (442 mm x 43 mm x 175 mm)
Weight	Unit:~4 lbs (1.81 kg) Shipping:8 lbs (3.63 kg)
Construction	Housing: Metal chassis Finish: Black

Connections	
RJ11	Pin 1: Power Ground Pin 2: RS232 TX Data Pin 3: Signal Ground Pin 4: RS232 RX Data Pin 5: N/C (no connection) Pin 6: Power
Environmental	
Temperature	Operating: 32°-122°F (0°-50°C) Storage: 14°-140°F (-10° - 60°C)
Relative Humidity	10%-95% (non-condensing)
Regulatory	
Emissions	FCC Part 15, Class A CE: EN61000-6-4:2001
Immunity	CE: EN50130-4: 1995 +A1:1998+A3:2003
System Compatibility	
HMXAT200	System Controller
MAXPRO-Net	System Server

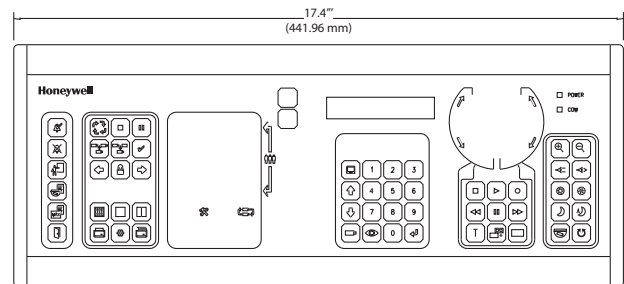

Ordering

HEGS5300	Honeywell Matrix System Keyboard, includes RJ11 termination box and 5' standard interface cable
----------	---

NOTE: Honeywell reserves the right, without notification, to make changes in product design or specifications.

Honeywell Security

Honeywell Video Systems
2700 Blankenbaker Pkwy, Suite 150
Louisville, KY 40299
1.800.796.CCTV
www.honeywell.com

L/HGS5300D/D
January 2008
© 2008 Honeywell International Inc.