

## HMM17

www.honeywellvideo.com

### 17-INCH MONOCHROME CRT MONITOR

The Honeywell HMM17 is a high quality 17-inch monochrome monitor. The monitor features a sturdy housing and delivers sharp images with over 900 TV lines of resolution. The HMM17 has convenient recessed front panel controls making setup and adjustment quick and easy while restricting movement caused by casual contact.

Installers can easily switch between EIA and CCIR video formats to comply with worldwide video standards. An illuminated green LED beside the power button confirms that power is being supplied to the monitor. The monitor features a latching power switch which remains in its set position – either On or Off – eliminating the need to turn the monitor back on in the event of a power loss.

The HMM17 has two composite BNC connectors with looping outputs. The BNC connectors are auto terminating, eliminating the need for installers to set termination switches when using for loop-through video. The HMM17 has audio input and output connectors, allowing users to listen in, as well as view the monitored area.

#### Market Opportunities

The Honeywell HMM17 is ideal for video surveillance and security applications. Its large viewing area is advantageous for applications requiring detailed picture-in-picture or multi-screen formats typically associated with quad processors or multiplexers. The audio feature is especially convenient for secured entry areas.

The Honeywell HMM17 monitor is designed to fit on a desktop or rack mounted using an optional rack mount kit (HMM17RK1).

#### Features


- >900 TVL
- Convenient recessed front panel controls
- Heavy-duty metal cabinet
- EIA or CCIR selectable
- Video loop-through with automatic termination
- A/B switch for video selection
- Audio Input/Output
- Latching power switch
- Rack mountable



## SPECIFICATIONS

Video	
Video Standard	EIA/CCIR
Input Signal Video/PC	Video A/B Composite, 1 Vp-p @ 75 Ohms
Deflection	90° angle
Bandwidth	8 Mhz
Resolution	>900 TV lines (at center)
Horizontal Scanning Frequency	EIA: 60 Hz CCIR: 50 Hz
Over/Under Scan	7% over scan / 3% under scan switchable
Horizontal Linearity	10% maximum
Vertical Linearity	10% maximum
Front Panel Controls	<ul style="list-style-type: none"> <li>•V-Size •H-Size •V-Hold •H-Hold •Bright</li> <li>•Contrast •Sharpness •Volume</li> <li>•Underscan/ Overscan selector</li> <li>•Channel A/B selector, •Channel LED</li> </ul>
Back Panel Controls	<ul style="list-style-type: none"> <li>•V-linearity •DC Restoration On/Off selector</li> </ul>
Electrical	
Operating Voltage	90 to 264 VAC, 60 Hz/50 Hz
Power Consumption	40 W Maximum (0.5 A)
Power Cable	NEMA 5-15P, UL IEC 320 type connector

Mechanical	
Dimensions (W x H x D)	16-11/32"x 14-13/16"x 14-3/16" (415 mm x 376 mm x 361mm)
Viewable Picture Area	.54 x.42 sq in 346.1 x 269.9 sq mm
Weight	30.86 lbs. (14 kg)
Construction	Housing: Steel Finish: Black
Video Inputs	2 x BNC (auto- terminating)
Video Outputs	2 X BNC (auto – terminating)
Audio Input	2 x RCA connectors 300 mVrms: 1 W
Audio Output	2 x RCA connectors 300 mVrms: 1 W
Environmental	
Temperature	Operating: 32° F to 104° F 0° C to 40° C Storage: 14° F to 122° F -10° C to 50° C
Relative Humidity	0% to 90% (non-condensing)
Regulatory	
Emissions	FCC: Part 15, Class B Canada ICES-003
Immunity	CE: EN 50130-4
Safety	UL: UL1950, cUL: CSA C22.2 No. 950 DHHS Rules 21
Accessories	
HMM17RK1	17" rack mount kit, black

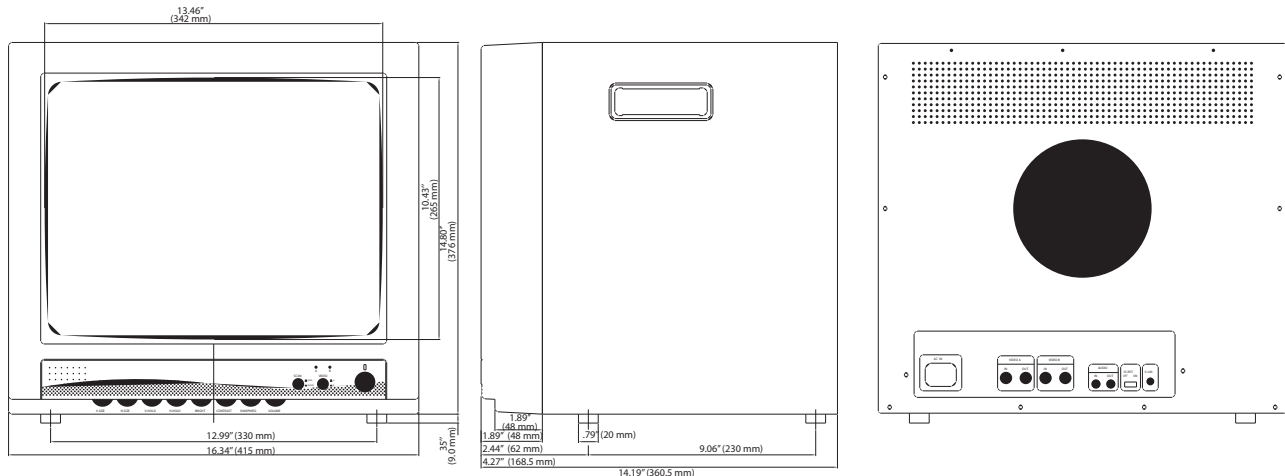

Ordering	
HMM17	17 inch Monochrome Monitor (black cabinet)

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

### Honeywell Security

Honeywell Video Systems  
2700 Blankenbaker Pkwy, Suite 150  
Louisville, KY 40299  
1.800.796.CCTV  
www.honeywell.com

L/HMM17D/D  
July 2007  
© 2007 Honeywell International Inc.

